



Pillow Blocks

UCP 200

normal-duty

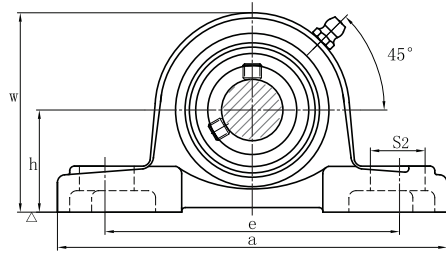

SR type seal



TRL type seal

Bearing unit	Shaft Dia.	Dimensions(in)or(mm)											Bolt used	Bearing	Housing	weight
No.	d	h	a	e	b	S2	S1	g	w	Bi	n			No.	No.	(kg)
(in.)	(mm)												(mm)	(in.)		
UCP 201	12	1 3/16	5	3 3/4	1 1/2	3/4	1/2	19 3/32	2 7/16	1.2205	0.5000			UC 201		
201-8	1/2	30.2	127	95	38	19	13	15	62	31.0	12.7	M10	3/8	201-8	P 201	0.63
UCP 202	15	1 3/8	5	3 3/4	1 1/2	3/4	1/2	19 3/32	2 7/16	1.2205	0.5000			UC 202		
202-10	5/8	30.2	127	95	38	19	13	15	62	31.0	12.7	M10	3/8	202-10	P 202	0.63
UCP 203	17	1 3/8	5	3 3/4	1 1/2	3/4	1/2	19 3/32	2 7/16	1.2205	0.5000			UC 203		
203-11	11/16	30.2	127	95	38	19	13	15	62	31.0	12.7	M10	3/8	203-11	P 203	0.63
UCP 204-12	3/4	1 3/8	5	3 3/4	1 1/2	3/4	1/2	19 3/32	2 7/16	1.2205	0.5000			UC 204-12		
204	20	33.3	127	95	38	19	13	15	65	31.0	12.7	M10	3/8	204	P 204	0.65
UCP 205-14	7/8	1 7/16	5 1/2	4 1/8	1 1/2	5/8	1/2	5/8	2 3/4	1.3386	0.5630			UC 205-14		
205-15	15/16	36.5	140	105	38	16	13	16	70	34	14.3	M10	3/8	205-15	P 205	0.79
205	25													205		
205-16	1													205-16		
UCP 206-18	1 1/8	1 11/16	6 1/2	4 9/64	1 7/8	53/64	2 1/32	45/64	3 17/64	1.5000	0.6260			UC 206-18		
206	30	42.9	165	121	48	21	17	18	83	38.1	15.9	M14	1/2	206	P 206	1.3
206-19	1 1/16													206-19		
206-20	1 1/4													206-20		
UCP 207-20	1 1/4	1 7/8	6 37/64	5	1 7/8	53/64	2 1/32	3/4	45/64	1.6890	0.6890			UC 207-20		
207-21	1 5/16	47.6	167	127	48	21	17	19	94	42.9	17.5	M14	1/2	207-21	P 207	1.60
207-22	1 3/8													207-22		
207	35													207		
207-23	1 7/16													207-23		
UCP 208-24	1 1/2	1 15/16	7 1/4	5 25/64	2 1/8	63/64	2 1/32	3/4	3 15/16	1.9370	0.7480			UC 208-24		
208-25	1 1/16	49.2	184	137	54	25	17	19	100	49.2	19.0	M14	1/2	208-25	P 208	2.00
208	40													208		
UCP 209-26	1 5/8	2 1/8	7 15/32	5 3/4	2 1/8	55/64	2 1/32	25/32	4 1/4	1.9370	0.7480			UC 209-26		
209-27	1 11/16	54.0	190	146	54	22	17	20	108	49.2	19.0	M14	1/2	209-27	P 209	2.20
209-28	1 3/4													209-28		
209	45													209		
UCP 210-30	1 7/8	2 1/4	8 1/8	6 1/4	2 3/8	63/64	25/32	55/64	4 1/2	2.0315	0.7480			UC 210-30		
210-31	1 15/16	57.2	206	159	60	25	20	22	114	51.6	19.0	M16	5/8	210-31	P 210	2.80
210	50													210		
210-32	2													210-32		
UCP 211-32	2 1/8	2 1/2	8 5/8	47 6/64	2 3/8	63/64	25/32	55/64	4 31/32	2.1890	0.8740			UC 211-32		
211-34	55	63.5	219	171	60	25	20	22	126	55.6	22.2	M16	5/8	211-34	P 211	3.40
211														211		
211-35	3/16													211-35		
UCP 212-36	2 1/4	2 3/4	9 1/2	7 1/4	2 3/4	63/64	25/32	63/64	5 7/16	2.5630	1.0000			UC 212-36		
212	60	69.8	241	184	70	25	20	25	138	65.1	25.4	M16	5/8	212	P 212	4.80
212-38	2 3/8													212-38		
212-39	2 1/2													212-39		
UCP 213-40	2 1/2	3	10 7/16	8	2 3/4	9/64	63/64	1/16	29/32	2.5630	1.0000			UC 213-40		
213	65	76.2	265	203	70	29	25	27	150	65.1	25.4	M20	3/4	213	P 213	5.70
UCP 214-44	2 3/4	3 3/8	10 15/32	8 9/32	2 27/32	1/32	63/64	1/16	6 9/64	2.9370	1.1890			UC 214-44		
214	70	79.4	266	210	72	31	25	27	156	74.6	30.2	M20	3/4	214	P 214	7.00
UCP 215	75	3 1/4	10 13/16	8 17/32	2 29/32	1/32	63/64	3/32	6 13/32	3.0630	1.3110			UC 215		
215-47	2 15/16	82.6	275	217	74	31	25	28	163	77.8	33.3	M20	3/4	215-47	P 215	7.60
215-48	3													215-48		
UCP 216	80	3 1/2	11 1/2	9 1/8	3 1/16	1/32	63/64	1/16	7/8	3.2520	1.3110			UC 216		
216-50	3 1/8	88.9	292	232	78	31	25	30	175	82.6	33.3	M20	3/4	216-50	P 216	9.00
UCP 217-52	3 1/4	3 3/4	12 23/32	9 3/32	3 9/32	1/32	63/64	1/4	7 3/8	3.3740	1.3425			UC 217-52		
217	85	95.2	310	247	83	31	25	32	187	85.7	34.1	M20	3/4	217	P 217	11.50
217-55	3 7/16													217-55		
UCP 218-56	3 1/2	4	12 7/8	10 5/16	3 15/32	1/64	1/16	1 1/32	7 7/8	3.7795	1.5630			UC 218-56		
218	90	101.6	327	262	88	33	27	34	200	96.0	39.7	M22	7/8	218	P 218	14.30